




LG VX4500 Keypad Replacement

Written By: David Foster

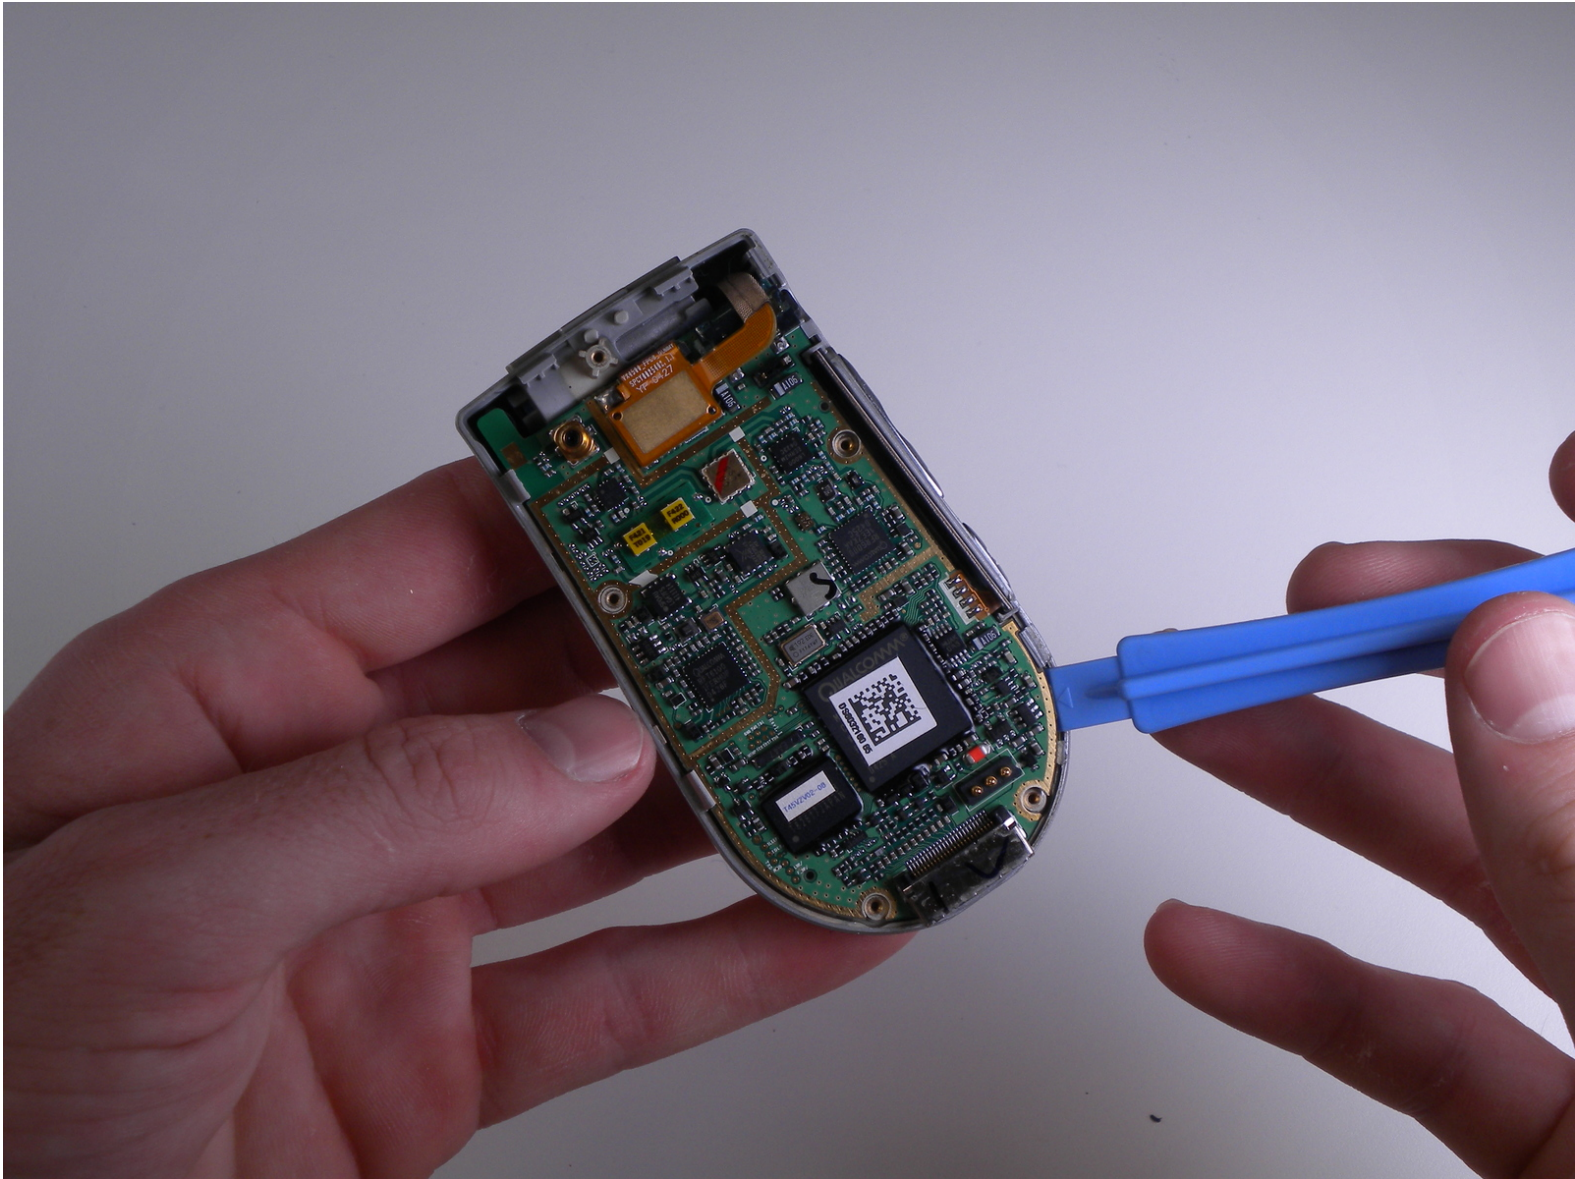

INTRODUCTION

Replacing the keypad.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

Step 2




- Now just lift up on the battery and remove it from the phone.

Step 3 — Rear Cover



- Remove the rubber grommet using a Spudger.


Step 4

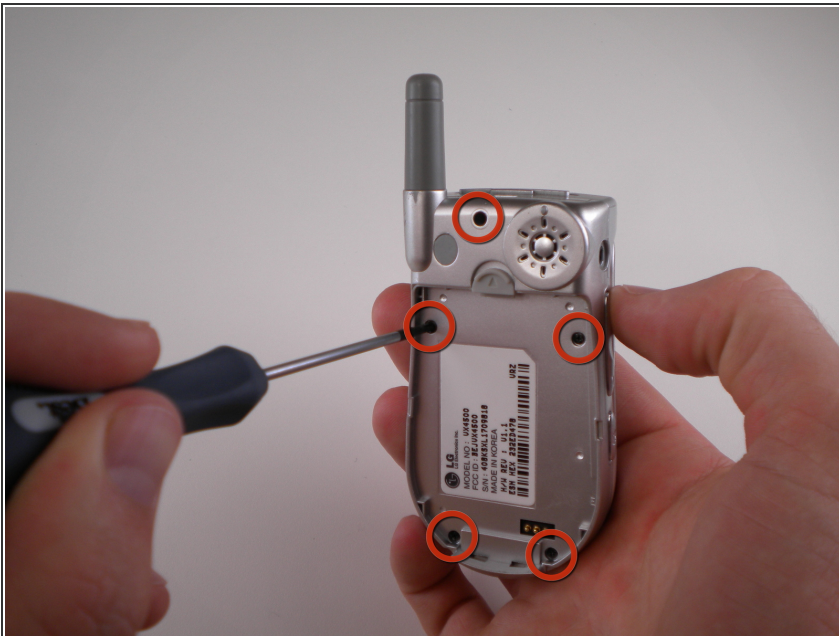

- ⚠ Be sure not to lose the screws. They are small!
- Remove the five screws using a Phillips #00 Screwdriver.

Step 5



 When removing back cover, be careful not to break the speaker wires.




- Using an iPod Opening Tool, carefully pry off the back cover.
- Using Tweezers, gently pull speaker wires out.

Step 6




- Separate the two halves.

Step 7 — Keypad

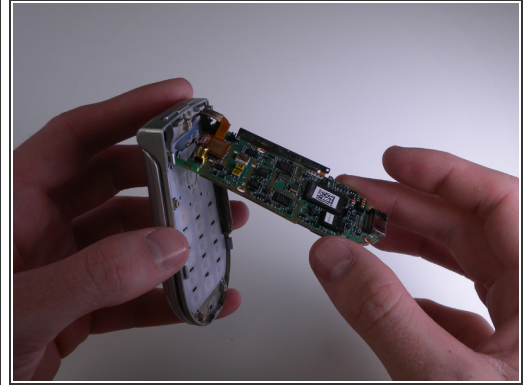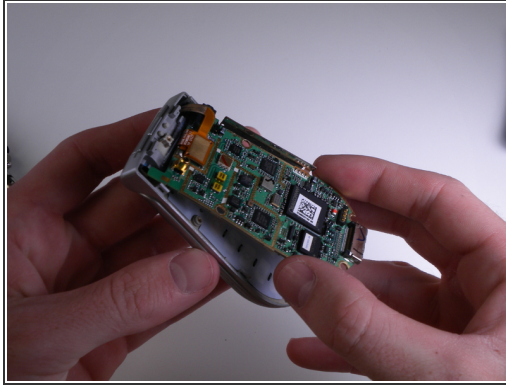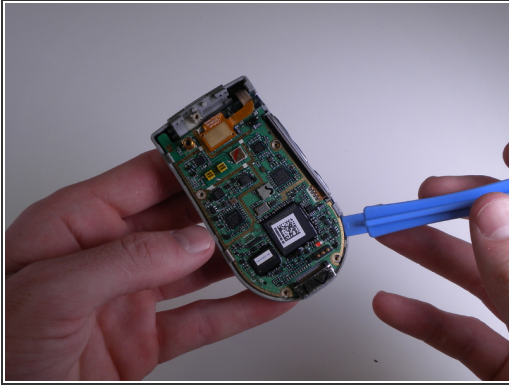


- Carefully pry and lift up on the logic board using an iPod Opening Tool.

Step 8

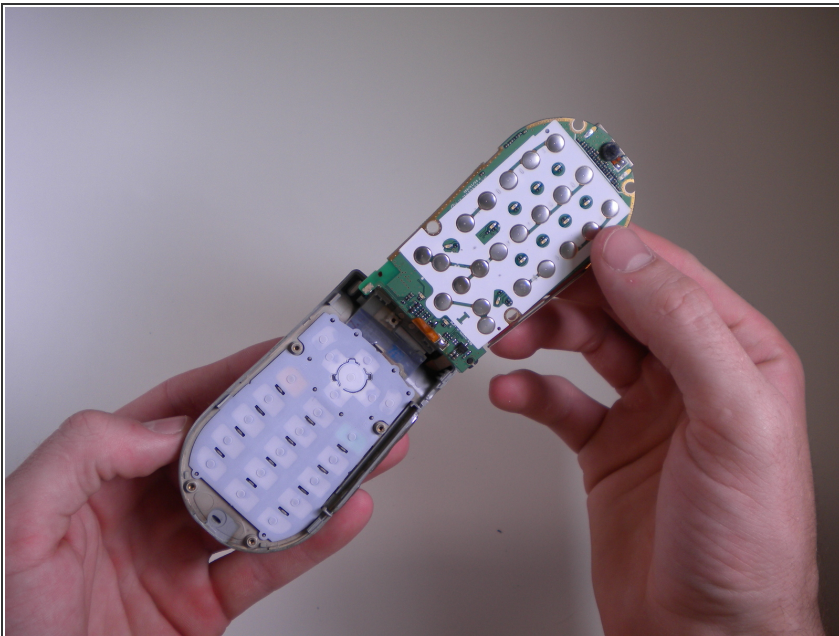

- Carefully flip the logic board up and out of the way.

Step 9

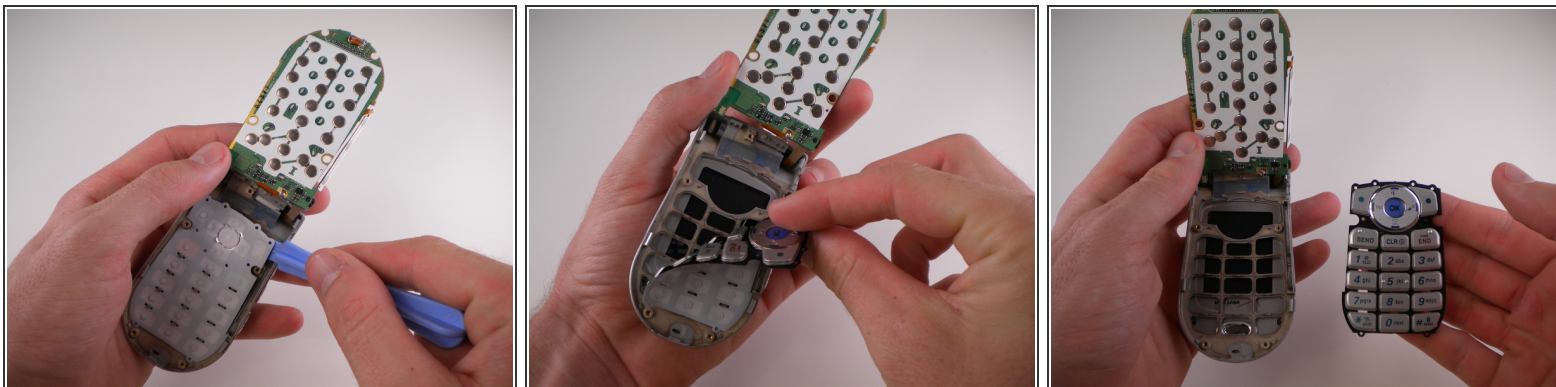

- Use an iPod Opening Tool to lift up on the keypad and pull it out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 12:59:10 AM.